

ATLAS

SINCE 1919

**STABLE.
STRONG.
STEADY.**

-  13.8 - 15.7 t
-  80 kW (109 HP)
-  0.7 - 1.0 m³



WHEELED EXCAVATOR 140W

WWW.ATLASGMBH.COM

TECHNICAL SPECIFICATION 140W

Technical specification

ENGINE

Power rating..... 80 kW (109 HP)	Number of cylinders 4	Generator 24 V / 100 A
RPM 1800/min	Bore / cylinder stroke 101 / 126	Starter..... 24 V / 4 kW
Make / model Deutz TCD 4.1 (Tier 4F)	Cooling system Water-cooled	
Design..... Turbocharger	Air filter..... Dry air filter	
Displacement..... 4038 cm ³	Battery..... 2 x 12 V / 100 Ah	

HYDRAULIC SYSTEM

• AWE 5 system (Load sensing)	• Suction valves for all work functions	• 2 additional circuits for additional consumer loads possible
• Load limit controlled high-performance pump	• Load-retaining and fine lowering valves in lifting circuit	• Max. oil flow..... 188 l/min
• Fuel-efficient flow-on-demand control	• Pipe break protection valves for lifting and articulated cylinders	• Max. operating pressure 350 bar
• Sensitive, proportional, independent control	• Grab / grab-rotating function equipped as standard	• Operating modes: 3 pre-programmed modes (Fine, Eco, Power)
• Primary and secondary protection against overload		

SWING ASSEMBLY

A hydrostatic drive with a 2-tier planetary gear and an axial piston motor acts like a wear-resistant service brake. Additional spring-mechanism multi-disc brake as a parking brake.	Axial piston motor with priority valve	• Max. swing speed 9/min
	Planetary transmission	• Swing torque 36 kNm
	Automatically controlled multi-disc brake	

TRACTION DRIVE AND BRAKES

• Variable displacement motor	• Automotive traveling and cruise control	• Tractive force..... 83.0 kN
• Power-shift transmission	• Max. speed..... 20 km/h	• Max. gradeability..... 65 %
• Double-acting brake valve	• Off-road speed 5 km/h	• Dual-circuit brake system Multi-disc
• Travel direction pre-selection via switch in joystick	• Crawling speed..... 1 km/h	• Parking brake Multi-disc

UNDERCARRIAGE

• 28 tons special excavator axles	• 8 tires (twins) 10.00 - 20	• 4 tires (optional) 600 - 22.5
• Steering axle with automatic oscillating axle locking		

FILL CAPACITIES

• Fuel tank 240 litres	• Engine oil..... 10 litres	• Hydraulic system..... 200 litres
• Cooling system..... 35 litres	• Hydraulic tank 125 litres	• Ad Blue® 20 litres

DRIVER'S CAB

• Meets latest safety standards (ROPS)	CONTROL:	CLIMATE CONTROL:
• Extra large entry zone	• Ergonomic joysticks with proportional slide control	• Air conditioning with Climatronic
• Spacious leg room	• Slim steering column, height and tilt adjustable	• Excellent air distribution through optimally arranged nozzles
• Excellent circumferential visibility	• Indicators, controls and operating switches are clearly arranged	
• Preparation for radio installation with mute function		SOUND LEVELS:
	MONITORING:	• ISO 6396 (L _{pA}) in driver's cab 72 dB(A)
DRIVER'S SEAT:	• Operating data display screen	• 2000/14 EG (L _{wA}) ambience level.... 96 dB(A)
• Air-cushioned comfort seat (seat heating optional)	• Automatic system for monitoring, warning and storage of data	
• Arm rests and lumbar support		
• Seat adjustable separately from console		

WORKING EQUIPMENT 140W

Working equipment

OPERATING WEIGHTS

	MONOBLOCK BOOM 4.22 m (C3.3M)		ADJUSTABLE BOOM Base arm 1.95 m (C3.41) Boom 3.07 m (C346)	
	Stick 1.96 m (D32)	Stick 2.50 m (D33)	Stick 1.96 m (D32)	Stick 2.50 m (D33)
Support and dozer blade	13.8 t	13.9 t	14.2 t	14.4 t
SDB / outriggers	14.9 t	15.0 t	15.3 t	15.4 t
4 outriggers	15.1 t	15.2 t	15.6 t	15.7 t

Operating weight incl. driver, fuel, lubricants and coolant plus 1.0 ton for attachments

EQUIPMENT

BASIC UNIT ATLAS 140W (can be combined)		
- Wheel Excavator 140W with support and dozer blade and 2 lifting cylinders (A4.2) - Wheel Excavator 140W with 4x outrigger support and 2 lifting cylinders (A4.32) - Wheel Excavator 140W with support and dozer blade on rigid axle, 2x outrigger support on steering axle and 2 lifting cylinders (A4.33) - Wheel Excavator 140W with support and dozer blade on steering axle, 2x outrigger support on rigid axle and 2 lifting cylinders (A4.35)	STANDARD EQUIPMENT:	- Ready for electric cooling box - Different options for storage, compartment for documents - Seat adjustable separately from console
	Engine:	
	- Automatic idling system - Cold start assistance	Seat adjustable separately from console
	Diesel pre-filter	Rear view security camera
	Engine monitoring	- Heat-absorbing glass, tinted windows - Automotive drive and cruise control
BOOMS:		
- Monoblock boom with stick cylinder 4.22 m (C3.3M) - Adjustable boom consisting of base arm 1.95 m (C3.41) with adjusting cylinder plus boom 3.07 m (C346) with stick cylinder	Hydraulic system:	Operating data display screen
	- Accumulator for emergency lowering of boom system - Proportional grab/grab rotating function - Pipe break protection valves for lifting and articulated cylinders	
STICKS:	- Max. load-limit control - Cylinder end position damping	EQUIPMENT:
- Stick 1.96 m (D32) - Stick 2.50 m (D33)		- Joint bearings in stick and bucket cylinders - Combined lubricating points for swing bearing and arm equipment
BUCKET TIPPING CYLINDER:		UNDERCARRIAGE:
Bucket tipping cylinder with bucket linkage (F31)	Cab:	- Power-shift transmission - Wet disc brakes - Toolbox in undercarriage - ZF axles
	- Air conditioning with Climatronic - Radio preparation with mute function - Slim steering column, height and tilt adjustable	

ADDITIONAL EQUIPMENT


Engine:	Working equipment:	- Proportional control of supports by slide in joystick - Alarm-signal while driving - Joystick steering - Head rest
- Refueling pump - Engine speed adjustment via potentiometer - Auxiliary heating	Automatically controlled and monitored electric central lubrication system for upper-carriage and arm equipment	
	Cab:	Undercarriage:
	- Cab protection guard - Beacon light - Heated driver's seat - GPS/GSM telemetric system for monitoring of operating data, consumption, position	- Wide axles (overall width 2750 mm) - Wide dozer blade (2750 mm) - High-speed option 37 km/h
Hydraulic system:	Radio, USB	Gear protection
- Hydraulic kit, to operate front and rear supports separately - Hydraulic kit, to operate supports per axle separately - Biodegradable oil	- Electric cooling box - Cab elevation	Wheel cover
270° camera system	LED working lights	Further special equipment: See price list

ATTACHMENTS (SELECTION)

	Bucket F415	Bucket F417
Capacity SAE	0.67 m ³	0.92 m ³
Cutting width	850 mm	1100 mm

WORKING RANGES 140W

Working ranges Monoblock boom 4.22 m (C3.3M)

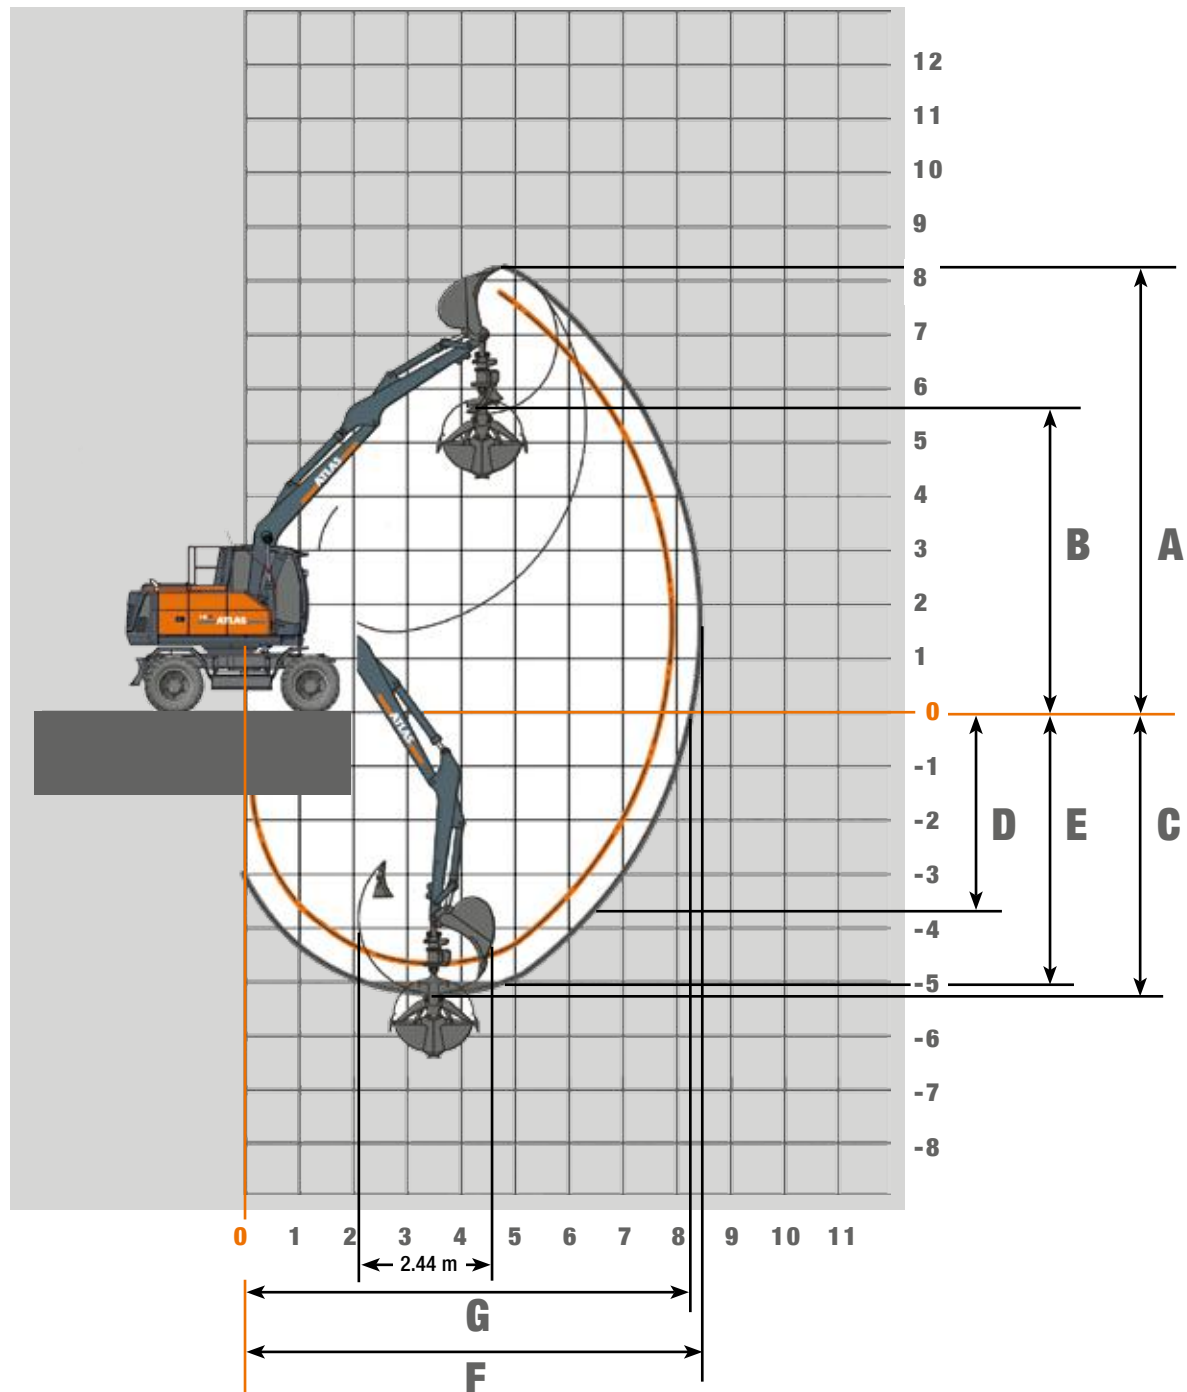

STICK LENGTHS	1.96 m (D32)	2.50 m (D33)
A Max. digging height	7.90 m	8.20 m
B Max. dumping height	5.20 m	5.50 m
C Max digging depth	4.60 m	5.51 m
D Max. vertical wall digging depth	3.70 m	3.70 m
E Max. digging depth of cut for 2.44 m level	4.40 m	4.95 m
F Max. digging reach	7.90 m	8.40 m
G Max. digging reach at ground level	7.70 m	8.25 m
Max. bucket digging force	106 kN	106 kN
Max. stick digging force	64 kN	55 kN

Unit is equipped with monoblock boom 4.22 m (C3.3M).

LIFTING CAPACITIES 140W

Lifting capacities Monoblock boom 4.22 m (C3.3M)

Lifting capacities Monoblock boom 4.22 m (C3.3M) and stick 1.96 m (D32). Max reach 7.90 m

Height	Undercarriage type		2.5 m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m
+ 5.0 m	FRONT		SDB rear, supported				3707	3631		
	LATERAL		SDB front, raised				3707	3631		
+ 4.0 m	FRONT		SDB supported				3707	3631		
	LATERAL		SDB raised				3707	3495*		
+ 3.0 m	FRONT		SDB rear, supported	6471	5462	4197	3938	3742	3599	
	LATERAL		SDB front, raised	6471	5462	4197	3938	3742	3599	
+ 2.0 m	FRONT		SDB supported	6471	5462	4197	3938	3742	3431*	
	LATERAL		SDB raised	6471	5462	4197	3938	3461*	3018*	
+ 1.0 m	FRONT		SDB rear, supported		6380	5439	4792	4321	3963	3678
	LATERAL		SDB front, raised		6380	5439	4792	4321	3963	3678
+ 0 m	FRONT		SDB supported		6198*	5130*	4359*	3776*	3319*	2950*
	LATERAL		SDB raised		5317*	4439*	3794*	3300*	2909*	2591*
- 1.0 m	FRONT		SDB rear, supported		6828	5822	5087	4533	4099	3741
	LATERAL		SDB front, raised		6828	5822	5087	4533	4099	3741
- 2.0 m	FRONT		SDB supported		6024*	4995*	4256*	3698*	3262*	2911*
	LATERAL		SDB raised		5151*	4310*	3695*	3225*	2854*	2552*
- 3.0 m	FRONT		SDB rear, supported		6487	5841	5125	4553	4081	3656
	LATERAL		SDB front, raised		6487	5841	5125	4553	4081	3656
- 4.0 m	FRONT		SDB supported		6487	5963*	4928*	4197*	3652*	3229*
	LATERAL		SDB raised		6367*	5093*	4246*	3639*	3180*	2821*
- 5.0 m	FRONT		SDB rear, supported	7142	6266	5504	4858	4303	3791	
	LATERAL		SDB front, raised	7142	6266	5504	4858	4303	3791	
- 6.0 m	FRONT		SDB supported	7142	5972*	4925*	4191*	3647*	3231*	
	LATERAL		SDB raised	7142	6397*	5102*	4243*	3633*	3176*	2823*
- 7.0 m	FRONT		SDB rear, supported	6768	6042	5365	4745	4167	3578	
	LATERAL		SDB front, raised	6768	6042	5365	4745	4167	3578	
- 8.0 m	FRONT		SDB supported	6768	6042	5365	4745	4167	3578	
	LATERAL		SDB raised	6768	6042	5153*	4284*	3668*	3215*	
- 9.0 m	FRONT		SDB rear, supported		4247	3769	3202			
	LATERAL		SDB front, raised		4247	3769	3202			
- 10.0 m	FRONT		SDB supported		4247	3769	3202			
	LATERAL		SDB raised		4247	3769	3202			


Lifting capacities Monoblock boom 4.22 m (C3.3M) and stick 2.5 m (D33). Max reach 8.40 m

Height	Undercarriage type		2.5 m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m
+ 5.0 m	FRONT		SDB rear, supported					3205	3180	2693	
	LATERAL		SDB front, raised					3205	3180	2693	
+ 4.0 m	FRONT		SDB supported					3205	3180	2693	
	LATERAL		SDB raised					3205	3067*	2679*	
+ 3.0 m	FRONT		SDB rear, supported					3379	3269	3187	2609
	LATERAL		SDB front, raised					3379	3269	3187	2609
+ 2.0 m	FRONT		SDB supported					3379	3269	3039*	2609
	LATERAL		SDB raised					3379	3040*	2676*	2368*
+ 1.0 m	FRONT		SDB rear, supported		4810	4322	3967	3698	3488	3321	3189
	LATERAL		SDB front, raised		4810	4322	3967	3698	3488	3321	3189
+ 0 m	FRONT		SDB supported		4810	4322	3967	3698	3395*	2999*	2672*
	LATERAL		SDB raised		4810	4322	3953*	3408*	2981*	2637*	2351*
- 1.0 m	FRONT		SDB rear, supported		7089	5848	5042	4479	4065	3748	3290
	LATERAL		SDB front, raised		7089	5848	5042	4479	4065	3748	3290
- 2.0 m	FRONT		SDB supported		7089	5848	5042	4386*	3788*	3321*	2946*
	LATERAL		SDB raised		6734*	5401*	4486*	3819*	3310*	2909*	2585*
- 3.0 m	FRONT		SDB rear, supported		6865	6574	5592	4891	4369	3965	3640
	LATERAL		SDB front, raised		6865	6574	5592	4891	4369	3965	3640
- 4.0 m	FRONT		SDB supported		6865	6059*	5012*	4261*	3694*	3250*	2893*
	LATERAL		SDB raised		6435*	5182*	4325*	3698*	3219*	2841*	2534*
- 5.0 m	FRONT		SDB rear, supported		7094	6783	5812	5078	4510	4055	3676
	LATERAL		SDB front, raised		7094	6783	5812	5078	4510	4055	3676
- 6.0 m	FRONT		SDB supported		7094	5934*	4906*	4174*	3625*	3197*	2854*
	LATERAL		SDB raised		6317*	5063*	4223*	3615*	3153*	2789*	2496*
- 7.0 m	FRONT		SDB rear, supported	6536	7664	6552	5680	4987	4423	3947	3517
	LATERAL		SDB front, raised	6536	7664	6552	5680	4987	4423	3947	3517
- 8.0 m	FRONT		SDB supported	6536	7494*	5907*	4871*	4140*	3597*	3178*	2846*
	LATERAL		SDB raised	6536	6309*	5037*	4189*	3582*	3126*	2771*	2488*
- 9.0 m	FRONT		SDB rear, supported	7918	6799	5905	5170	4553	4010	3495	
	LATERAL		SDB front, raised	7918	6799	5905	5170	4553	4010	3495	
- 10.0 m	FRONT		SDB supported	7918	6799	5905	4888*	4154*	3610*	3196*	
	LATERAL		SDB raised	7918	6355*	5064*	4205*	3595*	3138*	2788*	
- 11.0 m	FRONT		SDB rear, supported	6148	5385	4729	4137	3568	2925		
	LATERAL		SDB front, raised	6148	5385	4729	4137	3568	2925		
- 12.0 m	FRONT		SDB supported	6148	5385	4729	4137	3568	2925		
	LATERAL		SDB raised	6148	5385	4729	4137	3568	2925		

The specified max. loading capacities in kilograms (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.

WORKING RANGES 140W

Working ranges Adjustable boom: Base arm 1.95 m (C3.41) and boom 3.07 m (C346)

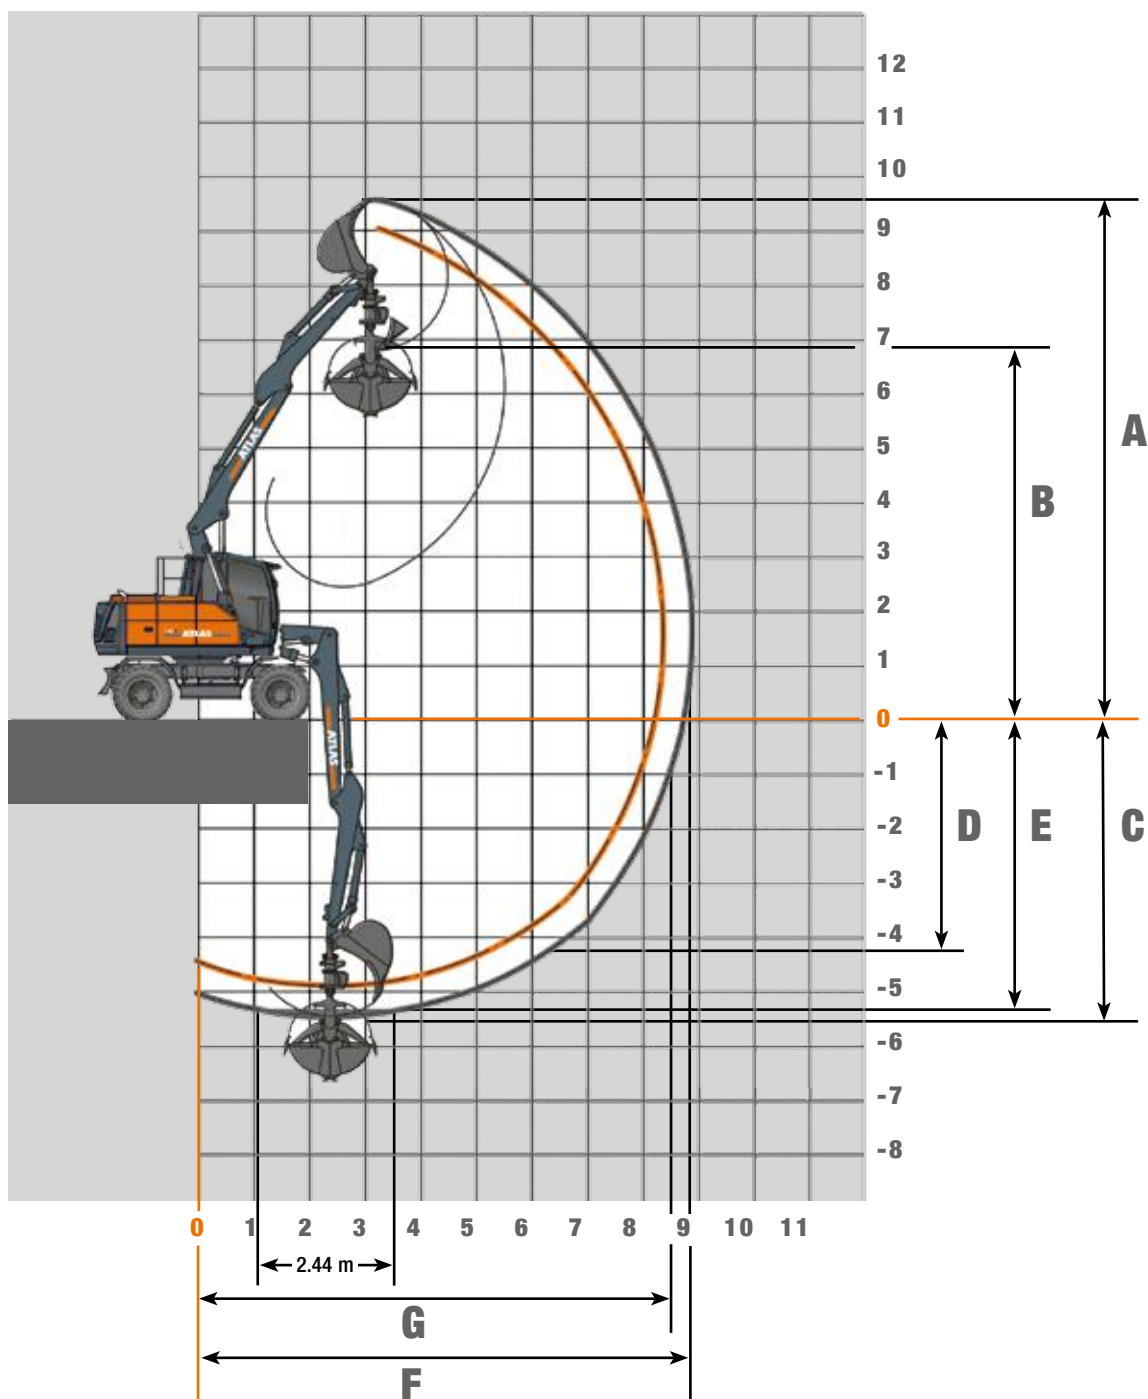

STICK LENGTHS	1.96 m (D32)	2.50 m (D33)
A Max. digging height	9.10 m	9.50 m
B Max. dumping height	6.35 m	5.70 m
C Max digging depth	4.90 m	5.40 m
D Max. vertical wall digging depth	3.65 m	4.20 m
E Max. digging depth of cut for 2.44 m level	4.75 m	5.30 m
F Max. digging reach	8.40 m	8.90 m
G Max. digging reach at ground level	8.15 m	8.70 m
Max. bucket digging force	106 kN	106 kN
Max. stick digging force	64 kN	55 kN

Unit is equipped with standard adjustable boom: base arm 1.95 m (C3.41) and boom 3.07 m (C346).

LIFTING CAPACITIES 140W

Lifting capacities Adjustable boom: Base arm 1.95 m (C3.41) and boom 3.07 m (C346)


Lifting capacities Adjustable boom: Base arm 1.95 m (C3.41) and boom 3.07 m (C346) with stick 1.96 m (D32). Max reach 8.40 m											
Height	Undercarriage type		2.5 m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m
+ 6.0 m	FRONT		SDB rear, supported		4260	3992	3790	3647			
			SDB front, raised		4260	3992	3790	3647			
	LATERAL		SDB supported		4260	3992	3790	3647			
			SDB raised		4260	3992	3790	3447*			
+ 5.0 m	FRONT		SDB rear, supported		5006	4516	4148	3863	3639	3463	3341
			SDB front, raised		5006	4516	4148	3863	3639	3463	3341
	LATERAL		SDB supported		5006	4516	4148	3863	3639	3396*	2943*
			SDB raised		5006	4516	4148	3863	3458*	2999*	2576*
+ 4.0 m	FRONT		SDB rear, supported	6597	5928	5113	4546	4127	3806	3552	3348
			SDB front, raised	6597	5928	5113	4546	4127	3806	3552	3348
	LATERAL		SDB supported	6597	5928	5113	4546	4127	3806	3370*	2585*
			SDB raised	6597	5928	5113	4546	3937*	3421*	3013*	2259*
+ 3.0 m	FRONT		SDB rear, supported	6398	6238	5906	5063	4476	4042	3705	3434
			SDB front, raised	6398	6238	5906	5063	4476	4042	3705	3434
	LATERAL		SDB supported	6398	6238	5906	5063	4339*	3778*	3342*	2585*
			SDB raised	6398	6238	5389*	4513*	3868*	3380	3000*	2597*
+ 2.0 m	FRONT		SDB rear, supported	7575	6992	6268	5462	4763	4243	3838	3511
			SDB front, raised	7575	6992	6268	5462	4763	4243	3838	3511
	LATERAL		SDB supported	7575	6992	5996*	5008*	4290	3749	3334*	2560*
			SDB raised	7575	6582*	5316*	4461*	3836*	3364*	2967*	2234*
+ 1.0 m	FRONT		SDB rear, supported	8606	7561	6475	5545	4850	4311	3879	3527
			SDB front, raised	8606	7561	6475	5545	4850	4311	3879	3527
	LATERAL		SDB supported	8606	7500*	6007*	5008	4295*	3768	3310*	2518*
			SDB raised	8606	6602*	5326	4465*	3849*	3376*	2891*	2193*
+ 0 m	FRONT		SDB rear, supported	9727	7866	6530	5583	4879	4337	3914	3579
			SDB front, raised	9727	7866	6530	5583	4879	4337	3914	3579
	LATERAL		SDB supported	9727	7587*	6079*	5073	4371*	3743*	3214*	2479*
			SDB raised	8807*	6673*	5354*	4453*	3795*	3258*	2799*	2155*
- 1.0 m	FRONT		SDB rear, supported	10030	7996	6644	5689	5012	4461	3911	3297
			SDB front, raised	10030	7996	6644	5689	5012	4461	3911	3297
	LATERAL		SDB supported	10030	7746*	6124*	5054*	4255*	3617*	3132*	2755*
			SDB raised	8664*	6528*	5230*	4354*	3683*	3137*	2718*	2392*
- 2.0 m	FRONT		SDB rear, supported	10246	8231	6844	5737	4820	3986	3109	
			SDB front, raised	10246	8231	6844	5737	4820	3986	3109	
	LATERAL		SDB supported	10246	7719*	6076*	4942*	4141*	3550*	3095*	
			SDB raised	8654*	6502*	5185*	4246*	3573*	3071*	2683*	

Lifting capacities Adjustable boom: Base arm 1.95 m (C3.41) and boom 3.07 m (C346) with stick 2.5 m (D33). Max reach 8.90 m													
Height	Undercarriage type			2.5 m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m
+ 5.0 m	FRONT		SDB rear, supported				3741	3523	3343	3194	3072	2981	
			SDB front, raised				3741	3523	3343	3194	3072	2981	
	LATERAL		SDB supported				3741	3523	3343	3194	3009	2634*	
			SDB raised				3741	3523	3343	3036*	2664*	2307*	
+ 4.0 m	FRONT		SDB rear, supported		5188	4588	4147	3808	3540	3323	3144	2995	2837
			SDB front, raised		5188	4588	4147	3808	3540	3323	3144	2995	2837
	LATERAL		SDB supported		5188	4588	4147	3808	3540	3323	2988	2657*	2326*
			SDB raised		5188	4588	4147	3808	3420*	3005*	2670*	2330*	2032*
+ 3.0 m	FRONT		SDB rear, supported	6355	6245	5400	4700	4195	3814	3515	3272	3069	2892
			SDB front, raised	6355	6245	5400	4700	4195	3814	3515	3272	3069	2892
	LATERAL		SDB supported	6355	6245	5400	4700	4195	3765	3318*	2960*	2649*	2325*
			SDB raised	6355	6245	5400	4520*	3860*	3363*	2970	2656*	2322*	2030*
+ 2.0 m	FRONT		SDB rear, supported	7583	6893	6132	5213	4562	4077	3700	3398	3144	2921
			SDB front, raised	7583	6893	6132	5213	4562	4077	3700	3398	3144	2921
	LATERAL		SDB supported	7583	6893	5978*	4986*	4263*	3715*	3287*	2948*	2617*	2302*
			SDB raised	7583	6551*	5301*	4430*	3801*	3322*	2948*	2634*	2290*	2008*
+ 1.0 m	FRONT		SDB rear, supported	8191	7369	6397	5469	4771	4234	3811	3465	3172	2935
			SDB front, raised	8191	7369	6397	5469	4771	4234	3811	3465	3172	2935
	LATERAL		SDB supported	8191	7369	5940	4945*	4236*	3699*	3287*	2936*	2564*	2263*
			SDB raised	8191	6518*	5259	4404*	3783	3320*	2974*	2568*	2238*	1970*
+ 0 m	FRONT		SDB rear, supported	9209	7725	6420	5490	4795	4255	3825	3478	3213	2871
			SDB front, raised	9209	7725	6420	5490	4795	4255	3825	3478	3213	2871
	LATERAL		SDB supported	9209	7459	5975*	4976*	4264*	3743*	3285*	2850*	2502*	2221*
			SDB raised	8647*	6576*	5299*	4440*	3819*	3304*	2866*	2483*	2177*	1929*
- 1.0 m	FRONT		SDB rear, supported	9825	7830	6501	5555	4852	4313	3919	3533	3072	
			SDB front, raised	9825	7830	6501	5555	4852	4313	3919	3533	3072	
	LATERAL		SDB supported	9825	7589*	6088*	5057*	4286*	3684*	3169*	2766*	2450*	
			SDB raised	8685*	6544*	5238*	4354*	3711*	3200*	2753*	2402*	2126*	
- 2.0 m	FRONT		SDB rear, supported	10065	8033	6688	5767	5026	4371	3746	3073		
			SDB front, raised	10065	8033	6688	5767	5026	4371	3746	3073		
	LATERAL		SDB supported	10065	7666*	6050*	4989*	4169*	3556*	3088*	2719*		
			SDB raised	8587*	6450*	5157*	4289*	3599*	3076*	2674*	2356*		
- 3.0 m	FRONT		SDB rear, supported	10000	7924	6435	5284	4316	3412	2476			
			SDB front, raised	10000	7924	6435	5284	4316	3412	2476			
	LATERAL		SDB supported	10000	7671*	5982*	4871*	4088*	3412	2476			
			SDB raised	8673*	6455*	5093*	4176*	3520*	3028*	2476			

The specified max. loading capacities in kilograms (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.


DIMENSIONS 140W

Dimensions

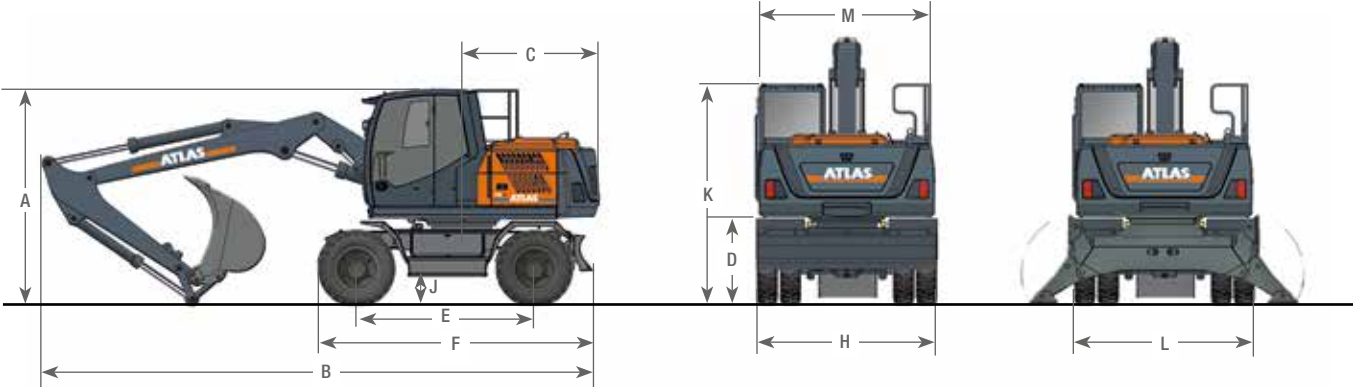

A TRANSPORT HEIGHT (with bucket)		C TAIL SWING RADIUS.....	
Adjustable boom* with stick 1.96 m	3.13 m	D CLEARANCE UNDER COUNTERWEIGHT	1.24 m
Adjustable boom* with stick 2.50 m	3.13 m	E WHEEL BASE	2.60 m
Monoblock boom 4.22 m with stick 1.96 m.....	3.13 m	F UNDERCARRIAGE LENGTH	4.08 m
Monoblock boom 4.22 m with stick 2.50 m.....	3.13 m	H DOZER BLADE WIDTH	2.54 m
B TRANSPORT LENGTH		J GROUND CLEARANCE.....	0.45 m
Adjustable boom* with stick 1.96 m	7.50 m	K OVERALL HEIGHT OF CAB	3.13 m
Adjustable boom* with stick 2.50 m	7.48 m	L OUTRIGGERS WIDTH (extended).....	3.50 m
Monoblock boom 4.22 m with stick 1.96 m.....	7.10 m	M OVERALL WIDTH OF SUPERSTRUCTURE.....	2.49 m
Monoblock boom 4.22 m with stick 2.50 m.....	7.05 m		

* Adjustable boom: Base arm 1.95 m (C3.41) and boom 3.07 m (C3.46)

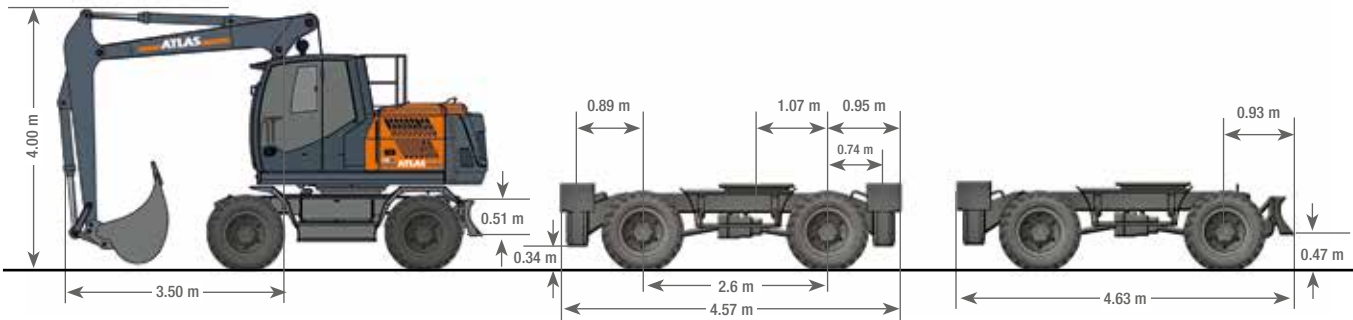

Road travel setup

Undercarriage with 4x outrigger support

Undercarriage with support combination (Support and dozerblade plus 2x outriggers)

GANDERKESEE FACTORY

Atlas GmbH
Atlasstraße 6
D-27777 Ganderkesee,
Germany

Tel.: +49 (0) 4222 954 0
Fax: +49 (0) 4222 954 220
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



VECHTA FACTORY

Atlas GmbH
Theodor-Heuss-Str. 3
D-49377 Vechta
Germany

T: +49 (0) 4441 954 0
F: +49 (0) 4441 954 299
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



DELMENHORST FACTORY

Atlas GmbH
Stedinger Straße 324
D-27751 Delmenhorst
Germany

T: +49 (0) 4221 49 10
F: +49 (0) 4221 49 14 43
E-mail: info@atlasgmbh.com
www.atlasgmbh.com

ATLAS CRANES UK LTD LADEKRANE

Wharfedale Road,
Euroway Trading Est.
Bradford, England BD4 6SL
United Kingdom

T: +44 8444 99 66 88
F: +44 1274 65 37 85
E-mail: atlasuk@atlasgmbh.com
www.atlas-cranes.co.uk
www.atlasgmbh.com



ATLAS SINCE 1919 **Wheeled Excavator
140W**



www.atlasgmbh.com

ATLAS GmbH
EXCAVATORS
Atlasstraße 6
D-27777 Ganderkesee, Germany
T: +49 (0) 4222 954 0
Fax: +49 (0) 4222 954 220
info@atlasgmbh.com